

# AZ847

## MICROMINIATURE POLARIZED RELAY

### FEATURES

- Microminiature size: Height: .217 inches (5.5 mm); Length: .551 inches (14 mm); Width: .354 inches (9 mm)
- High sensitivity, 79 mW pickup
- Monostable and bistable (latching) two coil versions available
- Meets FCC Part 68.302 1500 V lightning surge
- DIP terminal layout, fits 10 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- UL file E43203, CSA 73363



### CONTACTS

<b>Arrangement</b>	DPDT (2 Form C) Bifurcated crossbar contacts
<b>Ratings</b>	Resistive load: Max. switched power: 60 W or 62.5 VA Max. switched current: 2 A Max. switched voltage: 220 VDC or 250 VAC Max. carry current: 2 A
<b>Rated Load UL/CSA</b>	0.5 A at 125 VAC res. 2.0 A at 30 VDC res. 0.3 A at 110 VDC res.
<b>Material</b>	Silver palladium; gold clad
<b>Resistance</b>	< 50 milliohms initially

### COIL (Polarized)

<b>Power At Pickup Voltage (typical)</b>	Single side stable: 70–150 mW Bistable (latching) two coil: 100–150 mW
<b>Max. Continuous Dissipation</b>	700 mW at 20°C (68°F) ambient 530 mW at 40°C (104°F) ambient
<b>Temperature Rise</b>	18°C (32°F) at nominal coil voltage
<b>Temperature</b>	Max. 105°C (221°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay has fixed coil polarity.
3. Relay may pull in with less than "Must Operate" value.
4. Relay adjustment may be affected if undue pressure is exerted on relay case.
5. For complete isolation between the relay's magnetic fields, it is recommended that a .197" (5.0 mm) space be provided between adjacent relays.
6. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 1 x 10 <sup>8</sup> 5 x 10 <sup>5</sup> at 1 A 30 VDC, Res. 2 x 10 <sup>5</sup> at 0.5 A 125 VAC, Res.
<b>Operate Time (typical)</b>	2 ms at nominal coil voltage
<b>Release Time (typical)</b>	1 ms at nominal coil voltage (with no coil suppression)
<b>Set Time (bistable versions)</b>	2 ms at nominal coil voltage (typical)
<b>Reset Time (bistable versions)</b>	2 ms at nominal coil voltage (typical)
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Capacitance</b>	Contact to contact: 0.5 pF Contact set to contact set: 1.5 pF Contact to coil: 1.0 pF
<b>Dielectric Strength (at sea level)</b>	1000 Vrms between contact sets 1000 Vrms across contacts 1,250 Vrms contact to coil Meets FCC part 68.302 1500 V lightning surge
<b>Insulation Resistance</b>	1000 megohms min. at 25°C, 500 VDC, 50% RH
<b>Ambient Temperature Operating Storage</b>	At nominal coil voltage -40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	.130" DA at 10–55 Hz
<b>Shock</b>	50 g
<b>Enclosure</b>	LCP
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	260°C (500°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	1.2 grams

**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

5/24/04W

# AZ847


## RELAY ORDERING DATA

SINGLE SIDE STABLE					ORDER NUMBER
COIL SPECIFICATIONS					
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC		
3	6.7	64.3	2.3	AZ847-3	
5	11.2	178	3.8	AZ847-5	
6	13.4	257	4.5	AZ847-6	
9	20.1	579	6.8	AZ847-9	
12	26.8	1,028	9.0	AZ847-12	
24	44.9	2,880	18.0	AZ847-24	


  

BISTABLE (LATCHING) TWO COIL					ORDER NUMBER
COIL SPECIFICATIONS					
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$		Must Operate VDC	
		Coil I	Coil II		
3	5.6	45	45	2.3	AZ847P2-3
5	9.4	125	125	3.8	AZ847P2-5
6	11.2	180	180	4.5	AZ847P2-6
9	16.8	405	405	6.8	AZ847P2-9
12	22.4	720	720	9.0	AZ847P2-12
24	36.7	1,920	1,920	18.0	AZ847P2-24


## MECHANICAL DATA

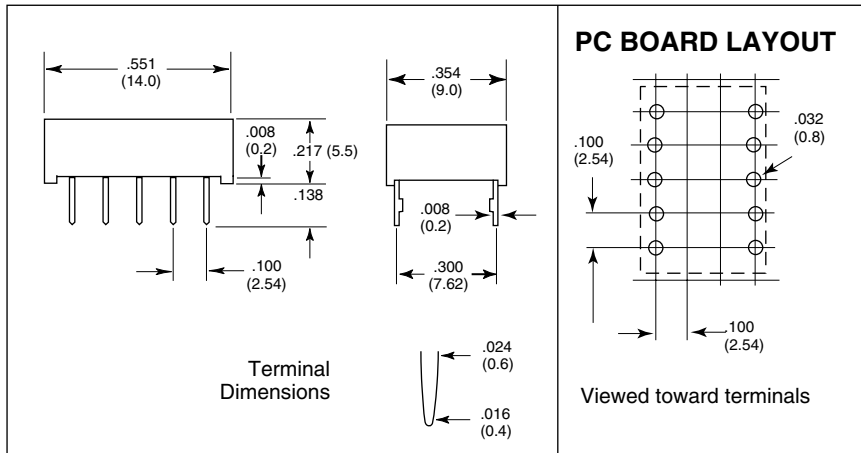

## Coil Temperature Rise

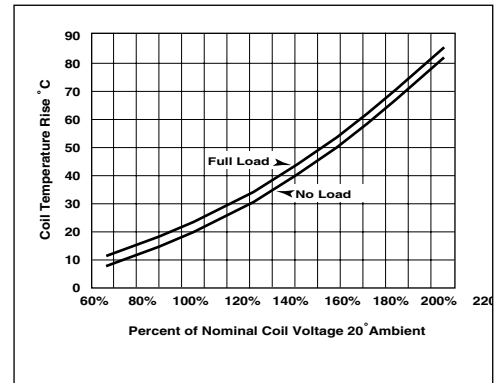


## Maximum Switching Capacity

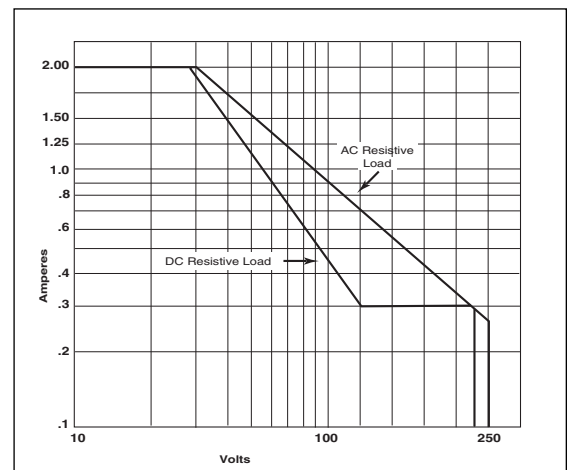

## WIRING DIAGRAMS

### SINGLE SIDE STABLE




Stripe on top of relay indicates location of pins 1 and 10.

WATCH FOR POLARITY

Viewed toward terminals

### BISTABLE (LATCHING) TWO COIL

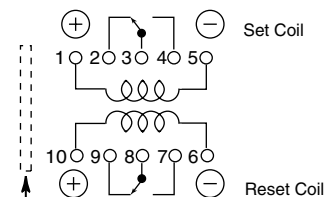

Diagrams show the "reset" position before energized with polarity as shown.

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm 0.010$ "

# AMERICAN ZETTLER, INC.

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

5/24/04W