


AZ8521

SUBMINIATURE SIGNAL RELAY

FEATURES

- Conforms to IEC60950/EN41003 spacing and high break-down voltage
- Monostable and bistable (latching) coil versions available
- High dielectric and surge voltage:
2.5KV surge (per FCC Part 68) and meets Telcordia
- Low power consumption: 64mW pickup
- Stable contact resistance for low level signal switching
- UL , CUR E43203



GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁸ at 3Hz 1 x 10 ⁵ at 0.5A, 125VAC, Res. 1 x 10 ⁵ at 2A, 30VDC, Res.
Operate Time (typical)	3ms at nominal coil voltage
Release Time (typical)	3ms at nominal coil voltage (with no coil suppression)
Bounce (typical)	At 10mA contact current 1ms at operate or release
Capacitance	< 1pF at 10KHz—open contacts < 1pF at 10KHz—adjacent contact sets
Dielectric Strength (at sea level)	See table
Dropout	Greater than 10% of nominal coil voltage
Insulation Resistance	10 ⁹ ohms min. at 25°C, 500 VDC, 50% RH
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 115°C (239°F)
Vibration	Functional 10–55 Hz 3.3mm DA Destructive 10-55Hz 5.0mm DA
Shock	Functional, 735 m/s ² Destructive, 980 m/s ²
Max. Solder Temp. Temp./Time	350°C (662°F) for 3 seconds 260°C (500°F) for 10 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight (approx.)	0.8 grams
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.

CONTACTS

Arrangement	DPDT (2 Form C)
Ratings	Resistive load: Max. switched power: 60W or 62.5VA Max. switched current: 2.0A Max. switched voltage: 220VDC or 250VAC
Rated Load UL/CSA	1A at 30VDC at 85°C 2A at 30VDC at 40°C 0.5A at 125VDC at 40°C
Material	Silver alloy; gold clad
Resistance	< 100 milliohms max (at 10mA, 30mV)

COIL (Polarized)

Power At Pickup Voltage (typical)	56mW - Latching coils 79mW (3–12 VDC) - Standard coils 130mW (24 VDC) - Standard coils
Max. Continuous Dissipation	1.0W at 20°C (68°F) 0.78W at 40°C (104°F)
Temperature Rise	At nominal coil voltage 18°C (32°F) (3–12 VDC) 25°C (45°F) (24 VDC)
Temperature	Max. 115°C (239°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Relay has fixed coil polarity.
4. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

2/09/16

AZ8521


RELAY ORDERING DATA

NON-LATCHING VERSION - STANDARD				ORDER NUMBER		
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	THT	SMT*	SMT Short Leg*
				1.5	2.25	16.1
3	4.5	64.3	2.25	AZ8521-3	AZ8521S-3	AZ8521S1-3
4.5	6.75	145	3.38	AZ8521-4.5	AZ8521S-4.5	AZ8521S1-4.5
5	7.5	178	3.75	AZ8521-5	AZ8521S-5	AZ8521S1-5
6	9	257	4.5	AZ8521-6	AZ8521S-6	AZ8521S1-6
9	13.5	579	6.75	AZ8521-9	AZ8521S-9	AZ8521S1-9
12	18	1028	9.00	AZ8521-12	AZ8521S-12	AZ8521S1-12
24	36	2504	18.00	AZ8521-24	AZ8521S-24	AZ8521S1-24


LATCHING VERSION				ORDER NUMBER		
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	THT	SMT*	SMT Short Leg*
				1.5	2.25	22.5
3	4.5	90	2.25	AZ8521P-3	AZ8521PS-3	AZ8521PS1-3
4.5	6.75	203	3.38	AZ8521P-4.5	AZ8521PS-4.5	AZ8521PS1-4.5
5	10	250	3.75	AZ8521P-5	AZ8521PS-5	AZ8521PS1-5
6	9	360	4.50	AZ8521P-6	AZ8521PS-6	AZ8521PS1-6
9	13.5	810	6.75	AZ8521P-9	AZ8521PS-9	AZ8521PS1-9
12	18	1440	9.00	AZ8521P-12	AZ8521PS-12	AZ8521PS1-12
24	36	4800	18.00	AZ8521P-24	AZ8521PS-24	AZ8521PS1-24

For SMT short leg add "1" after S. *Tape and reel available (900 pcs/reel minimum) add suffix "TR"

Temperature Profile

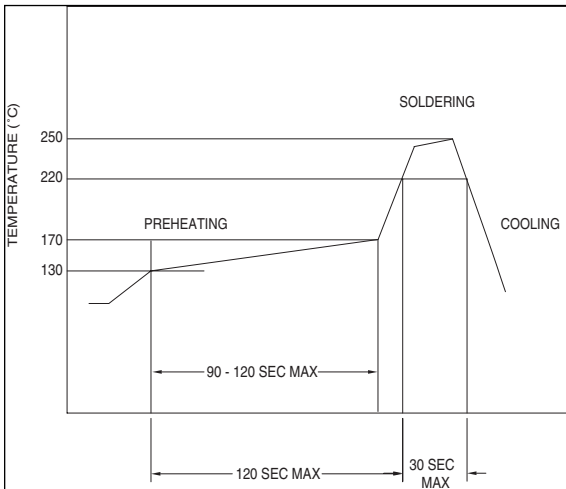

Packaging Specifications

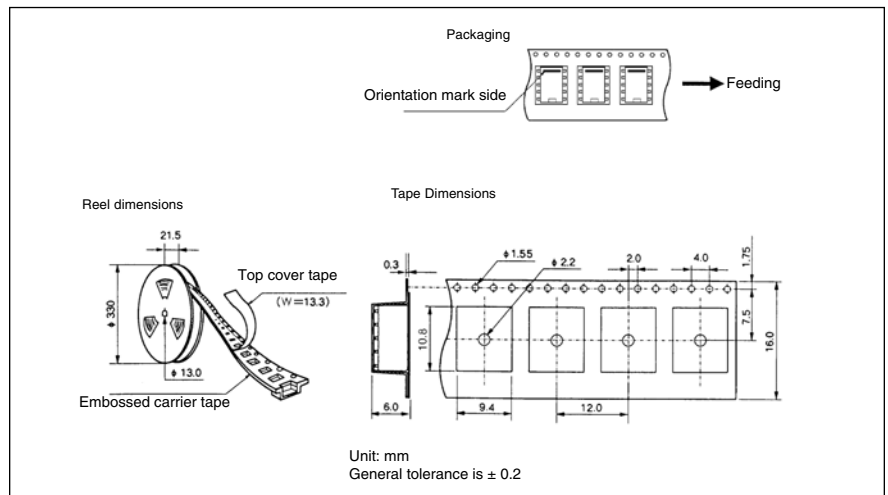

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM


2/09/16

AZ8521

	INITIAL DIELECTRIC STRENGTH (minimum)		SURGE	
	VRMS, 1 min.	Peak (V)	Rise Time (μ S)	Decay Time* (9μ S) (1/2 peak)
Between open contacts	1,000	1,500	10	160
Between contact sets	1,800	-	-	-
Between coil and contacts	1,600	2,500	2	10

* Decay time measured from beginning of surge.

Mechanical Data

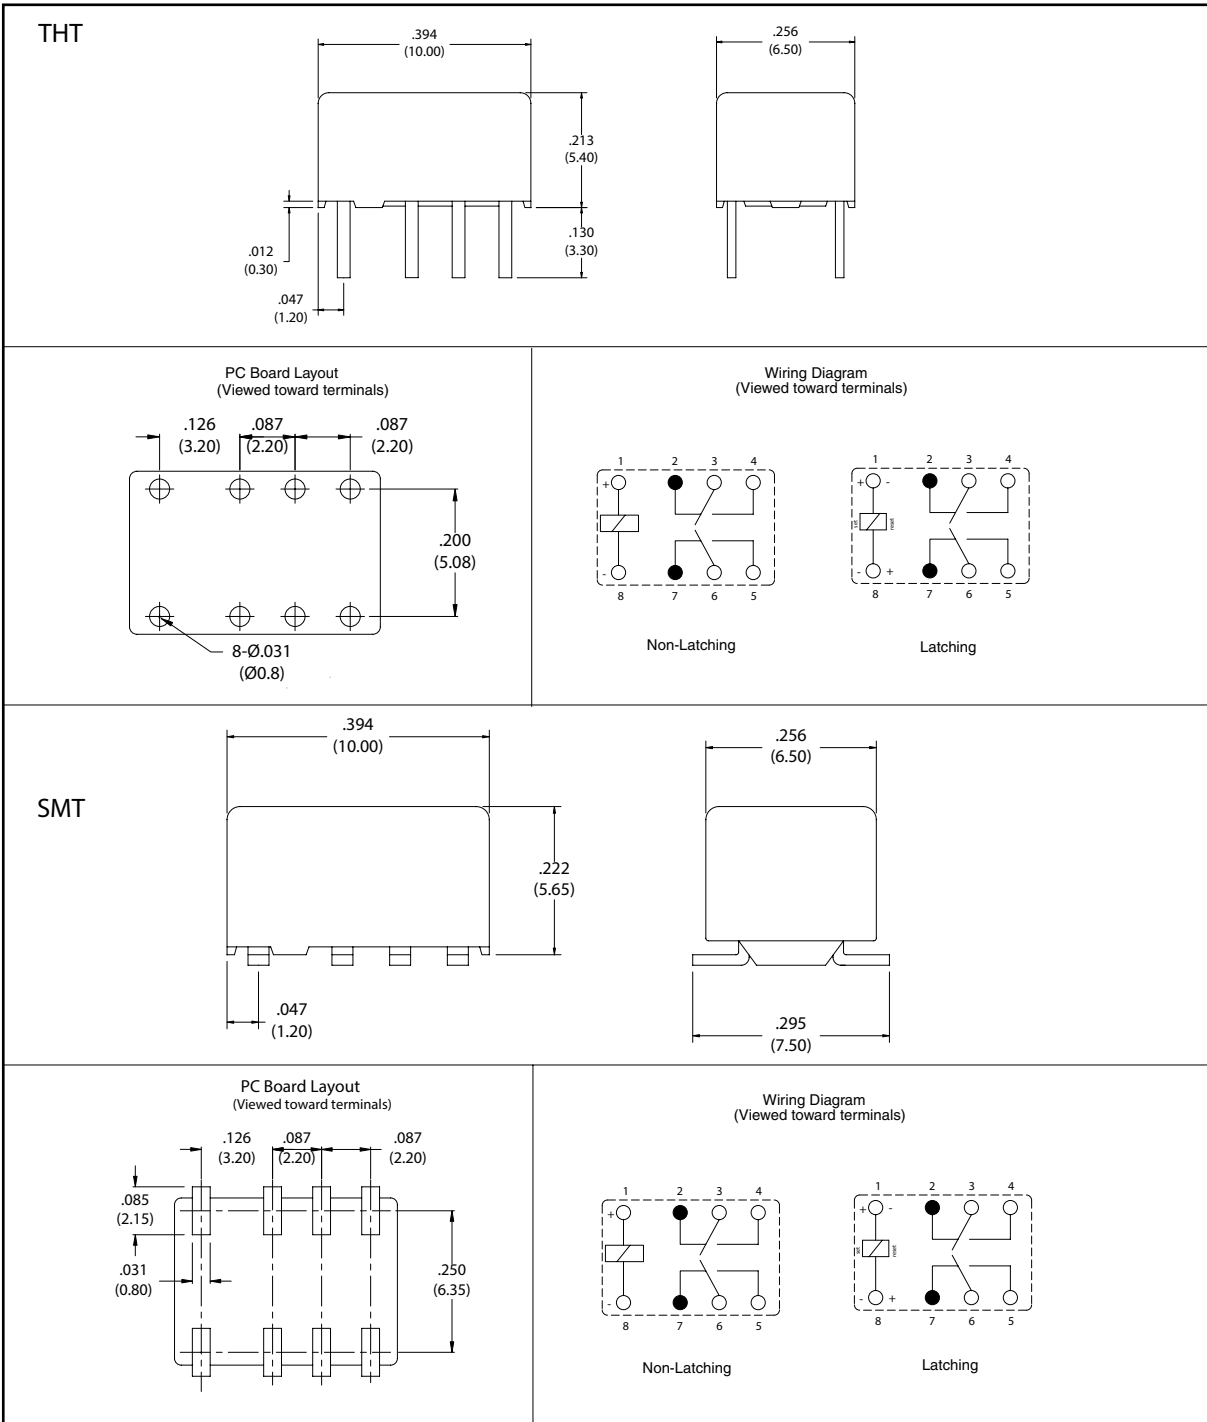

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

2/09/16