

AZ951/AZ952

SUBMINIATURE POWER RELAY

FEATURES

- Subminiature size for high density packaging
- Coil sensitivity to 116mW
- Extremely low cost
- Coils to 24VDC
- Epoxy sealed for automatic wave soldering
- 1 Amp, 3 Amp & 5 Amp contacts
- Life expectancy to 10 million operations
- UL, CUR file E43203



CONTACTS

Arrangement	SPDT (1 Form C)
Ratings	Resistive load:
Light Duty	Max. switched power: 30W or 125VA Max. switched current: 1A Max. switched voltage: 60VDC or 220VAC UL Rating: 1A at 30VDC 1A at 125VAC
Medium Duty	Max. switched power: 90W or 375VA Max. switched current: 3A Max. switched voltage: 60VDC or 300VAC UL Rating: 3A at 30VDC 3A at 125VAC
Heavy Duty	Max. switched power: 150W or 625VA Max. switched current: 5A Max. switched voltage: 60VDC or 300VAC UL Rating: 5A at 30VDC 5A at 125VAC 270VA, 120VAC Pilot Duty N.O. 30k cycles, N.C. 6k cycles
Material	Light and Medium Duty: Silver, gold plated Heavy Duty: Silver nickel gold plated
Resistance	< 50 milliohms initially

COIL

Power	
At Pickup Voltage (typical)	Standard Coil: 253mW Sensitive coil: 116mW
Max Continuous Dissipation	0.8W at 20°C (68°F) ambient 0.6W at 40°C (104°F) ambient
Temperature Rise	At nominal coil voltage: Standard: 54°C (97°F) Sensitive: 30°C (54°F)
Max. Temperature	105°C (221°F)

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 3A, 120VAC Res.
Operate Time (typical)	5ms at nominal coil voltage
Release Time (typical)	1ms at nominal coil voltage (with no coil suppressions)
Dielectric Strength (at sea level for 1 min.)	1000Vrms coil to contact 500Vrms between open contacts
Insulation Resistance	100 megohms min. at 20°C, 500 VDC
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage Standard: -25°C (-13°F) to 55°C (131°F) Sensitive: -25°C (-13°F) to 70°C (158°F) Both: -25°C (-13°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55Hz
Shock	10 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	3.5 grams

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request.
4. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

2/02/16

AZ951/AZ952

RELAY ORDERING DATA

STANDARD RELAYS — Light Duty Type					
COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC		
3	3.3	20	2.25	AZ951-1C-3DE	AZ952-1C-3DE
5	5.5	56	3.75	AZ951-1C-5DE	AZ952-1C-5DE
6	6.6	80	4.50	AZ951-1C-6DE	AZ952-1C-6DE
12	13.2	320	9.00	AZ951-1C-12DE	AZ952-1C-12DE
24	26.5	1280	18.00	AZ951-1C-24DE	AZ952-1C-24DE

SENSITIVE RELAYS — Light Duty Type					
COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC		
3	3.3	45	2.25	AZ951-1C-3DSE	AZ952-1C-3DSE
5	5.5	120	3.75	AZ951-1C-5DSE	AZ952-1C-5DSE
6	6.6	180	4.50	AZ951-1C-6DSE	AZ952-1C-6DSE
9	9.9	400	6.75	AZ951-1C-9DSE	AZ952-1C-9DSE
12	13.2	700	9.00	AZ951-1C-12DSE	AZ952-1C-12DSE
24	26.5	2800	18.00	AZ951-1C-24DSE	AZ952-1C-24DSE

STANDARD RELAYS — Medium Duty Type					
COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC		
3	3.3	20	2.25	AZ951-1CM-3DE	AZ952-1CM-3DE
5	5.5	56	3.75	AZ951-1CM-5DE	AZ952-1CM-5DE
6	6.6	80	4.50	AZ951-1CM-6DE	AZ952-1CM-6DE
12	13.2	320	9.00	AZ951-1CM-12DE	AZ952-1CM-12DE
24	26.5	1280	18.00	AZ951-1CM-24DE	AZ952-1CM-24DE

SENSITIVE RELAYS — Medium Duty Type					
COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC		
3	3.3	45	2.25	AZ951-1CM-3DSE	AZ952-1CM-3DSE
5	8.5	120	3.75	AZ951-1CM-5DSE	AZ952-1CM-5DSE
6	10.4	180	4.50	AZ951-1CM-6DSE	AZ952-1CM-6DSE
9	15.3	400	6.75	AZ951-1CM-9DSE	AZ952-1CM-9DSE
12	20.5	700	9.00	AZ951-1CM-12DSE	AZ952-1CM-12DSE
15	25.6	1093	11.30	AZ951-1CM-15DSE	AZ952-1CM-15DSE
18	30.8	1575	13.50	AZ951-1CM-18DSE	AZ952-1CM-18DSE
24	41.0	2800	18.00	AZ951-1CM-24DSE	AZ952-1CM-24DSE

AMERICAN ZETTLER, INC.

www.azettler.com

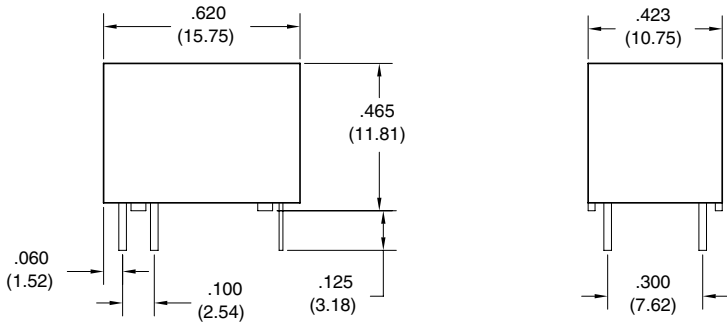
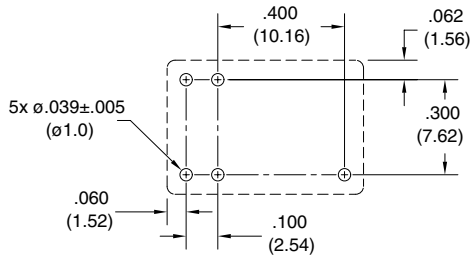
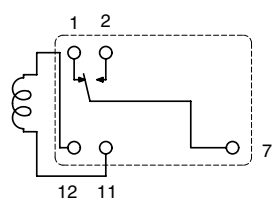
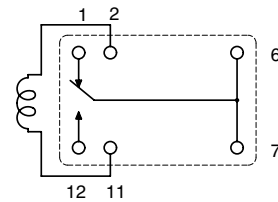
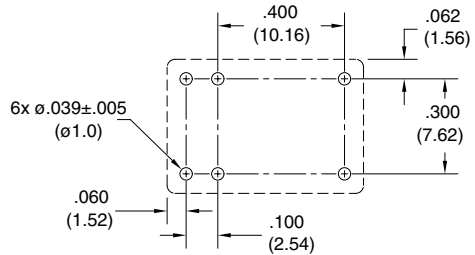
75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

2/02/16

AZ951/AZ952

STANDARD RELAYS — Heavy Duty Type				ORDER NUMBER	
COIL SPECIFICATIONS					
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance ±10%	Must Operate VDC		
3	3.3	20	2.25	AZ951-1CH-3DE	AZ952-1CH-3DE
5	5.5	56	3.75	AZ951-1CH-5DE	AZ952-1CH-5DE
6	6.6	80	4.50	AZ951-1CH-6DE	AZ952-1CH-6DE
12	13.2	320	9.00	AZ951-1CH-12DE	AZ952-1CH-12DE
24	26.5	1280	18.00	AZ951-1CH-24DE	AZ952-1CH-24DE

MECHANICAL DATA

	<p>AZ951 PC BOARD LAYOUT</p>  <p>VIEWED TOWARD TERMINALS</p>	
<p>AZ951 WIRING DIAGRAM</p>  <p>VIEWED TOWARD TERMINALS</p>	<p>AZ952 WIRING DIAGRAM</p>  <p>VIEWED TOWARD TERMINALS</p>	<p>AZ952 PC BOARD LAYOUT</p>  <p>VIEWED TOWARD TERMINALS</p>

Dimensions in inches with metric equivalents in parentheses. Tolerance: ±0.010"

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

2/02/16