

AZ2900

25 AMP POWER RELAY

FEATURES

- Panel mount
- Universal mounting bracket with break-away tabs
- 25 Amp switching
- Quick-connect terminals
- UL insulation system Class F
- UL, CUR file E44211
- UL LZGH2/8 Certified for use with A2L refrigerants



CONTACTS

Arrangement	SPST (1 Form A) SPST (1 Form B) SPST (1 Form A and 1 Form B) SPDT (1 Form C)
Ratings	Resistive load: Max. switched power: 6925 VA Max. switched current: 25 A Max. switched voltage: 277 VAC 1 Form A 12 FLA, 60 LRA at 125 VAC, 30k cycles [1],[2],[3] 8 FLA, 48 LRA at 250 VAC, 30k cycles [1],[2],[3] 8 FLA, 48 LRA at 277 VAC, 30k cycles [2],[3] 25 A at 277 VAC, resistive, 50k cycles [1],[3] 18 A at 277 VAC, resistive, 50k cycles [2],[3] 3 A at 277 VAC, 30k cycles General Use [2],[3] 277 VA at 277 VAC, 30k cycles (Pilot duty) [2] 1 Form B 14 FLA, 84 LRA at 125 VAC, 30k cycles at 40°C [1] 8 FLA, 48 LRA at 250 VAC, 30k cycles [1] 8 FLA, 48 LRA at 277 VAC, 30k cycles [1] 25 A at 277 VAC, resistive, 50k cycles [1] 3 A at 277 VAC, 30k cycles General Use [2] 277 VA at 277 VAC, 30k cycles (Pilot duty) [2] 1 Form C 14 FLA, 84 LRA at 125 VAC, 30k cycles [1],[3] 8 FLA, 48 LRA at 250 VAC, 30k cycles [1],[2],[3] 8 FLA, 48 LRA at 277 VAC, 30k cycles [1],[2],[3] 25 A at 277 VAC, resistive, 50k cycles [1],[3] 3 A at 277 VAC, 30k cycles General Use [1],[2] 277 VA at 277 VAC, 30k cycles (Pilot duty) [2] 18 A at 277 VAC, resistive, 50k cycles [2] 1 Form A & B 12 FLA, 60 LRA at 125 VAC, 30k cycles [1],[2],[3] 8 FLA, 48 LRA at 250 VAC, 30k cycles [1],[2],[3] 8 FLA, 48 LRA at 277 VAC, 30k cycles [1],[2] 18 A at 277 VAC, resistive, 100k cycles [1] 18 A at 277 VAC, resistive, 50k cycles [2],[3] 25 A at 277 VAC, resistive, 50k cycles [1] 3 A at 277 VAC, 30k cycles General Use [2] 277 VA at 277 VAC, 30k cycles (Pilot duty) [2]
UL, CUR	
Material	Silver Cadmium Oxide [1], Silver Cerium (Pilot) [2], Silver Tin Oxide [3]
Resistance	< 200 milliohms initially (24 V, 1 A voltage drop method)

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁶ 1 x 10 ⁵ at 25 A 277 VAC Res.
Operate Time (typical)	25 ms at nominal coil voltage
Release Time (typical)	25 ms at nominal coil voltage
Dielectric Strength (at sea level for 1 min.)	2500 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	500 megohms min. at 500 VDC, 20°C 50% RH
Dropout	Greater than 20% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 65°C (149°F) -40°C (-40°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55 Hz
Shock Operating	10 g, 11 ms 1/2 sine (no false operation)
Enclosure	Phenolic
Terminals	Quick-connect
Weight	85 grams

COIL

Power At Nominal Voltage (typical)	4.0 VA
Temperature Rise	60°C (108°F) at nominal coil voltage
Temperature	Max. 155°C (311°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.

AZ2900

RELAY ORDERING DATA


COIL SPECIFICATIONS					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Coil Resistance $\pm 10\%$	Coil Current A	1 Form C**
24	20.4	31.2	77	0.167	AZ2900-1C-24A
120	102	132	2000	0.033	AZ2900-1C-120A
240	204	264	7250	0.017	AZ2900-1C-240A
277	235	305	11000	0.014	AZ2900-1C-277A

*For 1 Form A, 1 Form B, or 1 Form A & B, substitute "-1A", "-1B" or "-1AB" in place of "-1C". For Silver Cerium (AgCe) contact material add suffix "E". For Silver Tin Oxide (AgSnO₂) contact material add Suffix "T".

For permanent plastic mounting tabs on 2.15" (hole diameter .150") centers add suffix "P" or for 2.62" centers (hole diameter .189") add "P1".

**There is no terminal "6" on 1 Form C relays.

MECHANICAL DATA

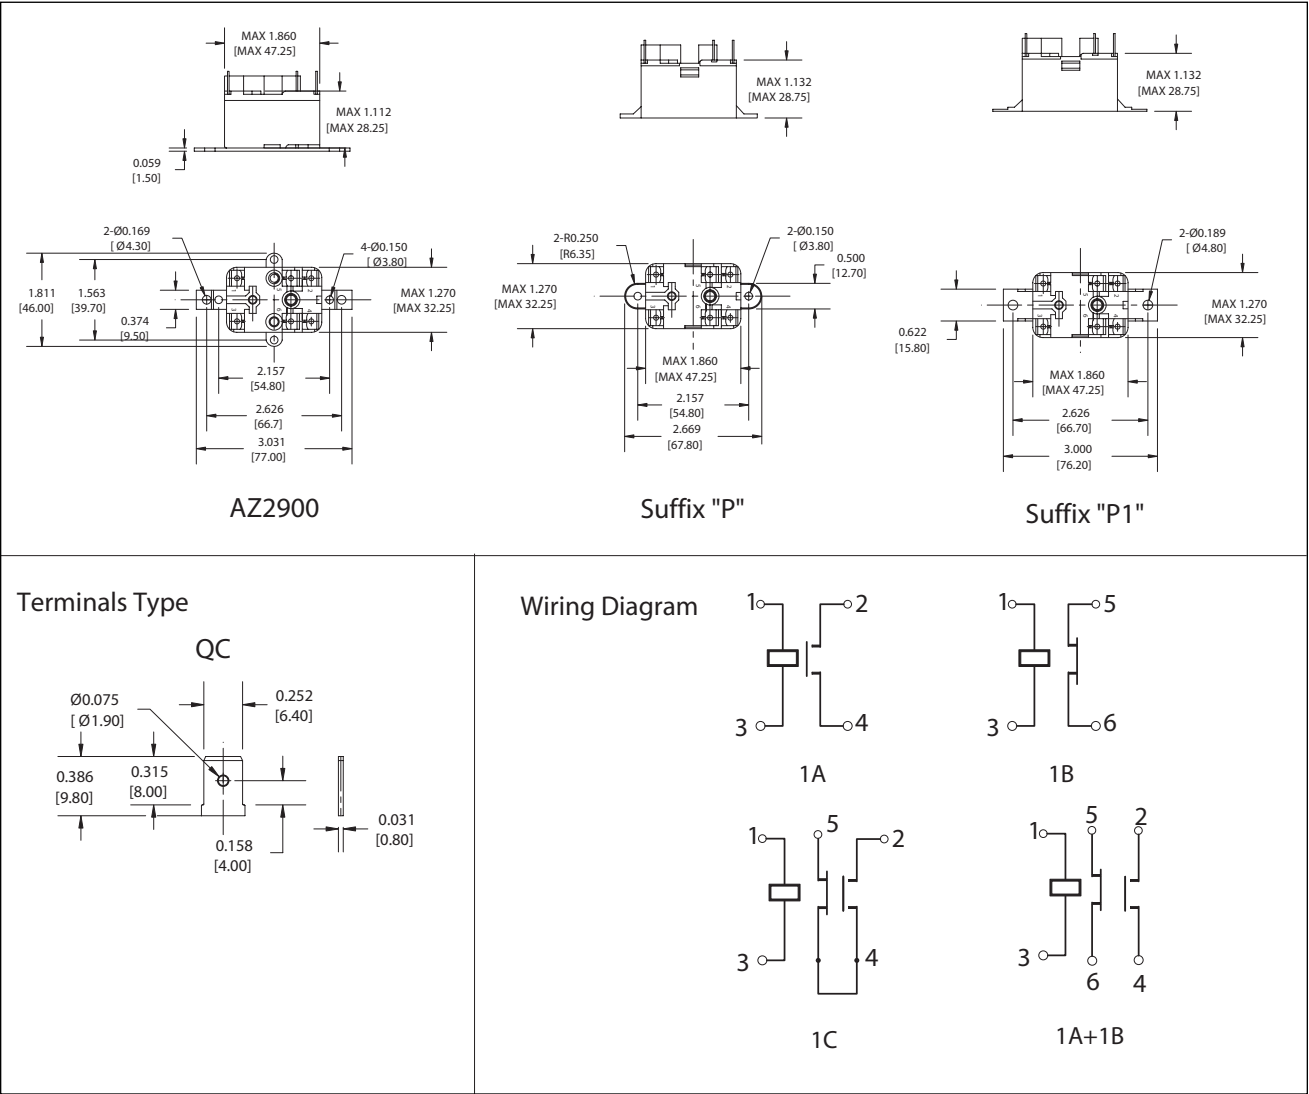

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

AMERICAN ZETTLER, INC.

9/16/2024

PHONE: (949) 831-5000

www.azettler.com

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.