

AZ725


RELAY ORDERING DATA

COIL SPECIFICATIONS — DC Coil				ORDER NUMBER*		
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal mA $\pm 10\%$	Coil Resistance $\pm 10\%$	Form A (SPST)	Form C (SPST)
5	3.5	11.3	102.0	49	AZ725-1AE-5D	AZ725-1CE-5D
6	4.2	13.3	88.21	68	AZ725-1AE-6D	AZ725-1CE-6D
12	8.4	26.0	46.2	260	AZ725-1AE-12D	AZ725-1CE-12D
24	16.8	53.5	21.8	1,100	AZ725-1AE-24D	AZ725-1CE-24D
48	33.6	107.0	10.9	4,400	AZ725-1AE-48D	AZ725-1CE-48D
60	42.0	135.0	8.6	7,000	AZ725-1AE-60D	AZ725-1CE-60D

* Substitute "1BE" in place of "1AE" for Form B contacts.

DESCRIPTION	ORDER NUMBER
Socket	ST484-U1
Retaining Clip	ST482-2

MECHANICAL DATA

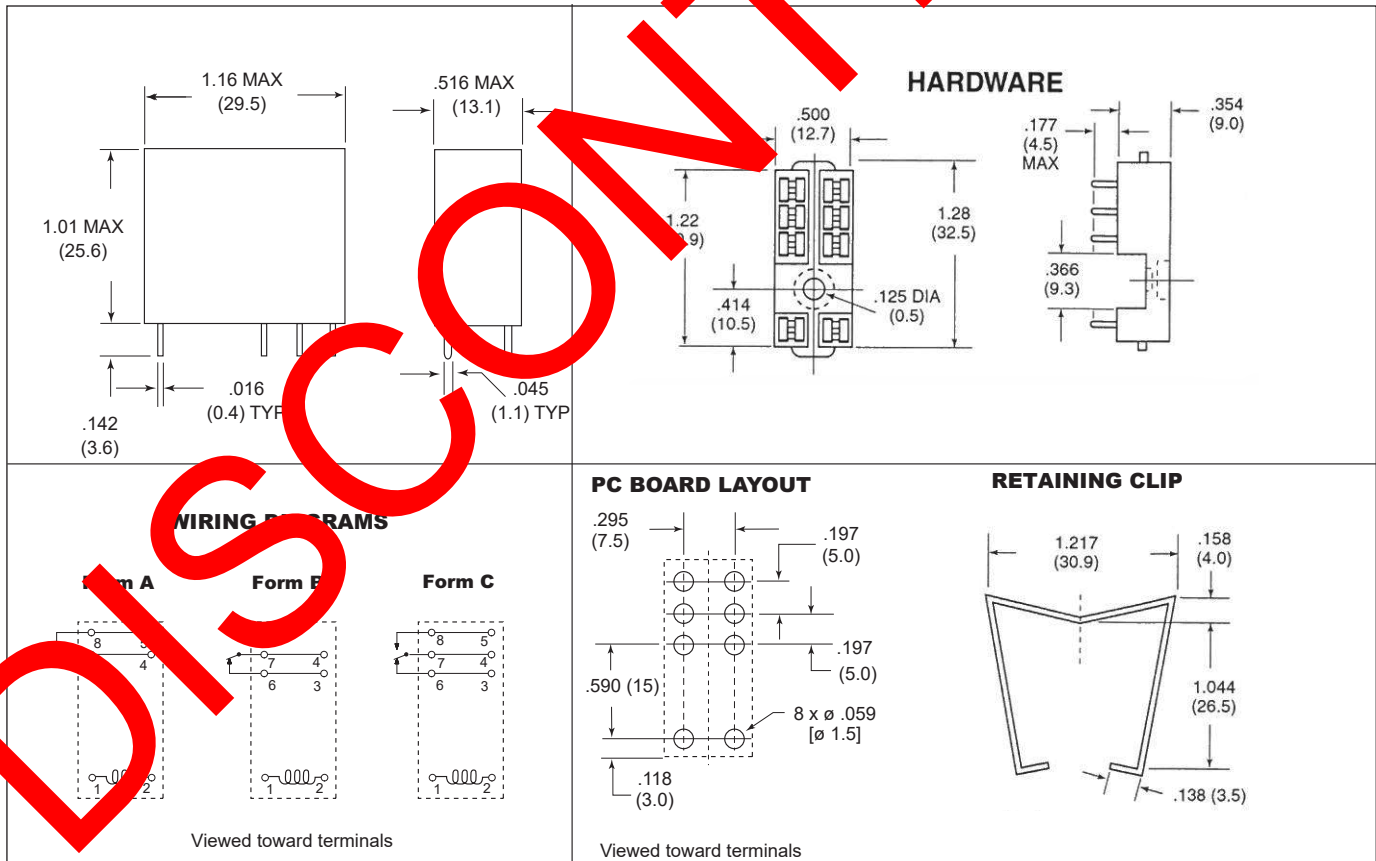

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010''$

AMERICAN ZETTLER, INC.

2/16/21

PHONE: (949) 831-5000

www.azettler.com

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.