

AZ7621

RELAY ORDERING DATA


COIL SPECIFICATIONS – 12 A RATING - DC COIL				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Unsealed	Sealed
5	3.5	6.5	61	AZ7621-1C-5D	AZ7621-1C-5DE
6	4.2	7.8	88	AZ7621-1C-6D	AZ7621-1C-6DE
9	6.3	11.7	198	AZ7621-1C-9D	AZ7621-1C-9DE
12	8.4	15.6	351	AZ7621-1C-12D	AZ7621-1C-12DE
24	16.8	31.2	1,405	AZ7621-1C-24D	AZ7621-1C-24DE
48	33.6	62.4	5,620	AZ7621-1C-48D	AZ7621-1C-48DE

* Substitute "1A" in place of "1C" for Form A respectively. Add suffix "A" for gold plated contacts.

HARDWARE ORDERING DATA

DESCRIPTION	ORDER NUMBER	DESCRIPTION	ORDER NUMBER
Socket	ST482-U1	Retainer	ST482-3

MECHANICAL DATA

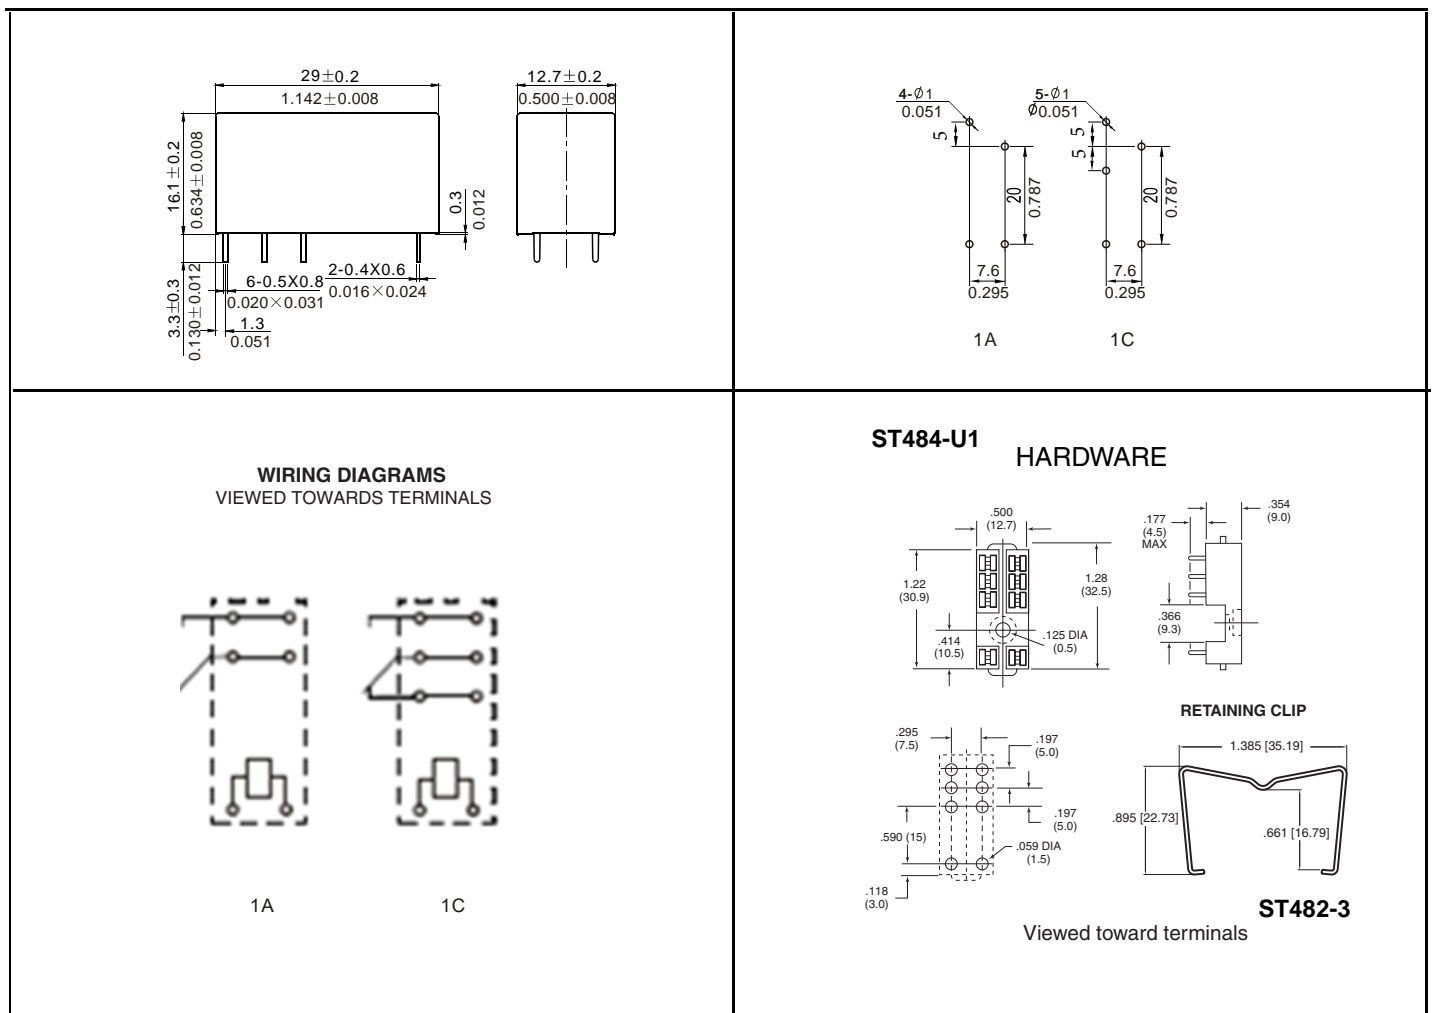

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "