

AZ765

SPST SUBMINIATURE POWER RELAY

FEATURES

- Small footprint
- Low cost
- Epoxy sealed version available
- 10 Amp switching
- UL, CUR file E44211



CONTACTS

Arrangement	SPST (1 Form A)
Ratings	Resistive load: Max. switched power: 150 W or 1250 VA Max. switched current: 10 A Max. switched voltage: 30* VDC or 250 VAC *Note: If switching voltage is greater than 30VDC, special precautions must be taken. Please contact the factory.
Rated Load UL, CUR	10 A at 125 VAC, 5A at 250 VAC 5 A at 30 VDC
Material	Silver cadmium oxide
Resistance	< 50 milliohms initially (24 V, 1 A voltage drop method)

COIL

Power At Pickup Voltage (typical)	253 mW
Max. Continuous Dissipation Temperature Rise	1.1 W at 20°C (68°F) ambient 42°C (76°F) at nominal coil voltage
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 10 A 120 VAC Res.
Operate Time (typical)	8 ms at nominal coil voltage
Release Time (typical)	5 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	2500 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 20°C 500 VDC 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 65°C (149°F) -40°C (-40°F) to 105°C (221°F)
Vibration	0.040" DA at 10–50 Hz
Shock	10 g operating, 100 g damage
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	6 grams

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

12/11/08W


AZ765

RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	1 Form A
3	2.25	4.7	20	AZ765-1A-3D
5	3.75	7.7	55	AZ765-1A-5D
6	4.5	9.4	80	AZ765-1A-6D
9	6.75	14.0	180	AZ765-1A-9D
12	9.0	18.7	320	AZ765-1A-12D
18	13.5	28.1	720	AZ765-1A-18D
24	18.0	37.5	1,280	AZ765-1A-24D
48	36.0	62.4	5,120	AZ765-1A-48D

*Add suffix "E" for epoxy sealed version.

MECHANICAL DATA

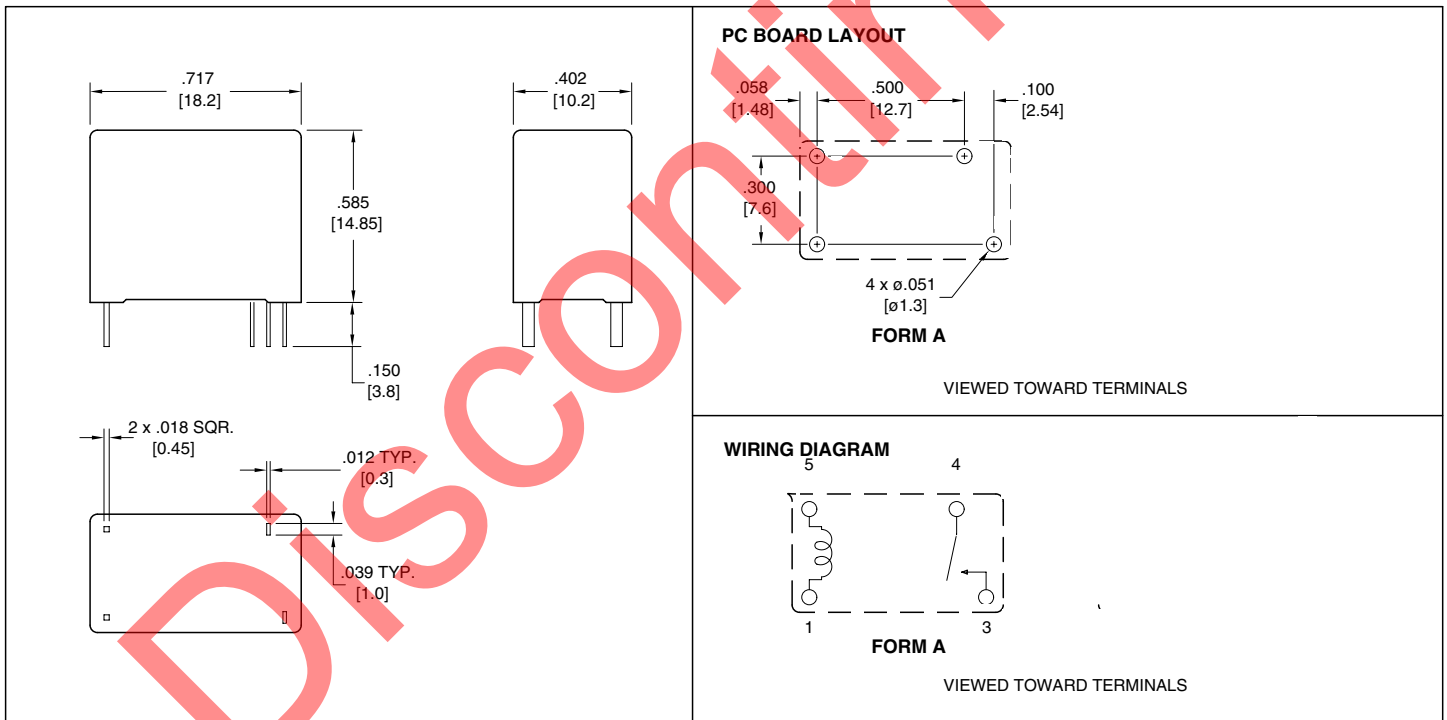

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

12/11/08W