


# AZ900

## 50 AMP HEAVY DUTY POWER RELAY

### FEATURES

- SPST, DPST, SPDT, and DPDT versions available
- AC and DC coils available
- UL Class F (155°C) molded construction
- 900, 900D and 900E are UL and cUL Listed
- 900S, 900Q, and 900R are UL cUR Recognized
- UL, CUL file E44211

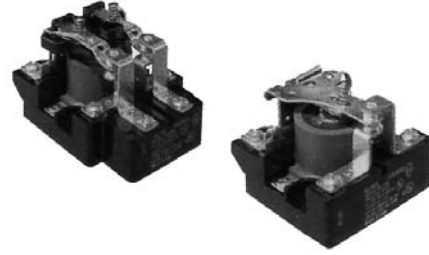

### CONTACTS

<b>Arrangement</b>	SPST ( 1 Form A & B), SPST-NO-DM ( Form 1X), SPST-NC-DB (Form 1Y), DPST ( 2 Form A & B ), SPDT ( 1 Form C), DPDT ( 2 Form C)
<b>Ratings</b>	Resistive load: Max. switched power: 840 W or 12000 VA Max. switched current: 30 A Max. switched voltage: 600 VAC, 28 VDC
<b>UL, CUR</b>	30 A at 240 VAC [1][2][3] 1.5 HP at 120 VAC [1][2][3] 2.0 HP at 240 VAC [1][2][3] 3600 VA at 120 VAC / 240 VAC ballast [1][2][3] 30 A at 240 VAC Res., 100k cycles [1][2][3] 20 A at 600 VAC [1][2][3] 30 A at 28 VDC [1][2][3] Aux. Snap Switch 1/4 HP at 125 VAC / 240 VAC [2] 20 A at 125 VDC [3] 50 A at 277 VAC Res., [4][5] 40 A at 277 VAC General use (inductive) [4][5]  900Q series [1], 900S [2], 900D [3], 900E [4], 900R [5]
<b>Material</b>	Silver cadmium oxide
<b>Resistance</b>	< 50 milliohms initially (24 V, 1 A voltage drop method)

### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 30 A 240 VAC Res.
<b>Operate Time (typical)</b>	30 msec at nominal coil voltage
<b>Release Time (typical)</b>	30 msec at nominal coil voltage (without suppression)
<b>Dielectric Strength</b> (at sea level for 1 min.)	2200 Vrms contact to contact 2200 Vrms contact to coil
<b>Insulation Resistance</b>	100 megohms min. at 20°C, 500 VDC 50% RH
<b>Dropout</b>	DC: > 10% of nominal coil voltage AC: > 20% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b>	-45°C (-49°F) to 80°C (176°F) AC coil, 30A -45°C (-49°F) to 70°C (239°F) AC coil, 50A -45°C (-49°F) to 115°C (176°F) DC coil, 30A -45°C (-49°F) to 105°C (239°F) DC coil, 50A
<b>Weight</b>	227 grams

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	DC: 1.12 W AC: 6.9 VA
<b>Max. Continuous Dissipation</b>	DC: 3.3 W at 25°C AC: 12.5 VA at 25°C
<b>Temperature Rise</b>	70°C at nominal coil voltage (AC) 35°C at nominal coil voltage (DC)
<b>Max. Temperature</b>	155°C (311°F)

### NOTES

1. All values at 25°C (77°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

# AZ900

## RELAY ORDERING DATA

COIL SPECIFICATIONS – DC Coil					ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal Current mA $\pm 10\%$	Coil Resistance $\pm 10\%$	
6	4.50	7.8	333	18	AZ900-1C-6D
12	9.1	15.4	166	72	AZ900-1C-12D
24	18.0	32.0	83	290	AZ900-1C-24D
48	36.0	62.6	42	1150	AZ900-1C-48D
110	82.5	143.0	18.2	6050	AZ900-1C-110D
COIL SPECIFICATIONS – AC Coil 50/60 Hz					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Coil Power VA	Coil Resistance $\pm 10\%$	
6	5.1	6.9	9.5	0.85	AZ900-1C-6A
12	10.2	13.8	9.5	2.85	AZ900-1C-12A
24	20.4	27.6	9.5	11.5	AZ900-1C-24A
120	102.0	138.0	9.5	295.0	AZ900-1C-120A
240	204.0	276.0	9.5	1170.0	AZ900-1C-240A
480	408.0	552.0	9.5	4860.0	AZ900-1C-480A


\*For double pole version replace "-1C" with "-2C", "-2A", or "-2B". For SPST replace "-1C" with "-1A" or "-1B". For SPST-NO-DM replace "-1C" with "-1X"(Short Base). For SPST-NC-DB replace "-1C" with "-1Y"(Long Base). For addition of SPDT Auxiliary Snap Switch Rated at 10A and 1/4 H.P. add "S" after 900. For Q.C. 0.250" terminals add "Q" after 900. For blow out magnets used in high dc loads add "D" after 900. For 50A rating with box lug termination add "E" after 900. For 50A rating with screw termination add "R" after 900.

# AMERICAN ZETTLER, INC.


4/29/09w

# AZ900

## MECHANICAL DATA

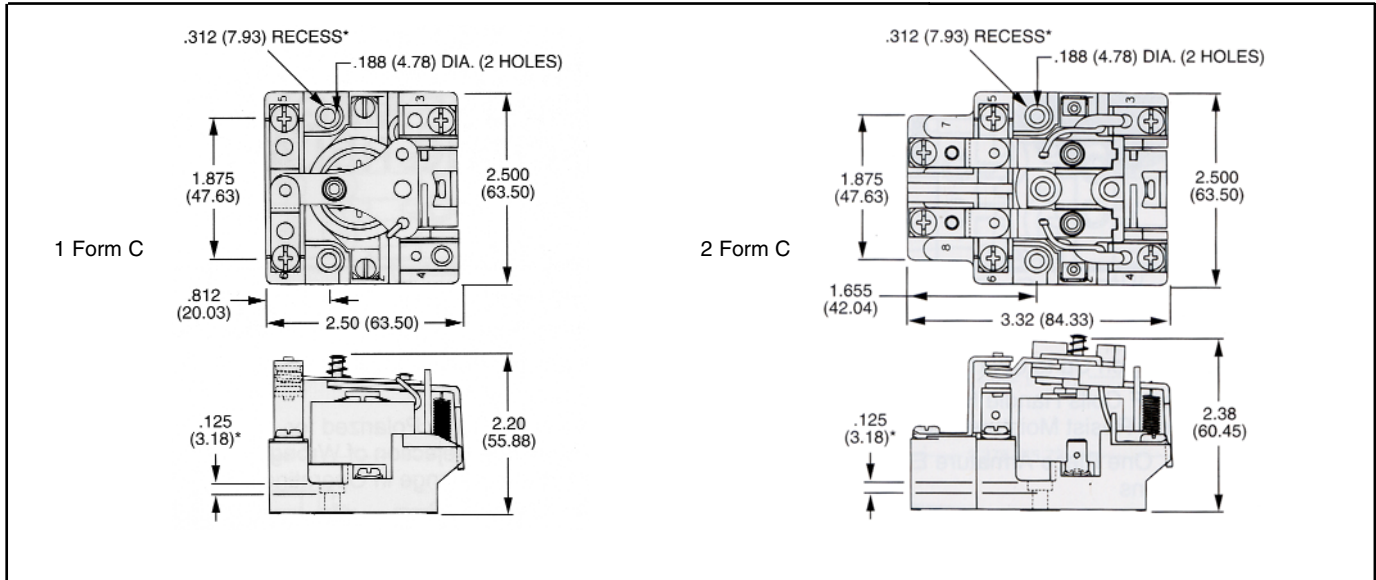

## WIRING DIAGRAM

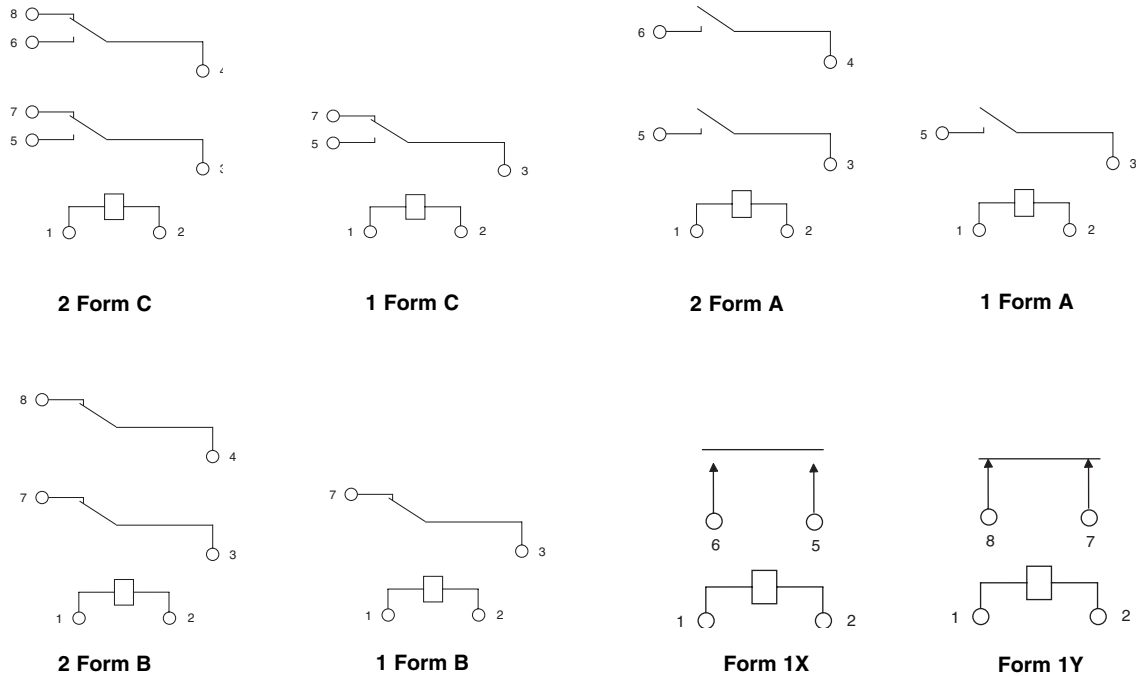

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010''$

# AMERICAN ZETTLER, INC.

4/29/09w

PHONE: (949) 831-5000

[www.azettler.com](http://www.azettler.com)

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.