





# AZ974

## RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	SPST	SPDT
6	3.9	10.1	22	AZ974-1A-6D	AZ974-1C-6D
12	7.8	20.2	85	AZ974-1A-12D	AZ974-1C-12D
24	15.6	40.5	350	AZ974-1A-24D	AZ974-1C-24D

\*Add suffix "E" for epoxy sealed version. Add suffix "R" for resistor across coil (6V=180 ohms, 12V=680 ohms, 24V=2700 ohms). Add suffix D1 for diode across coil (anode on #86) or suffix D2 for diode across coil (anode on #85).

## MECHANICAL DATA

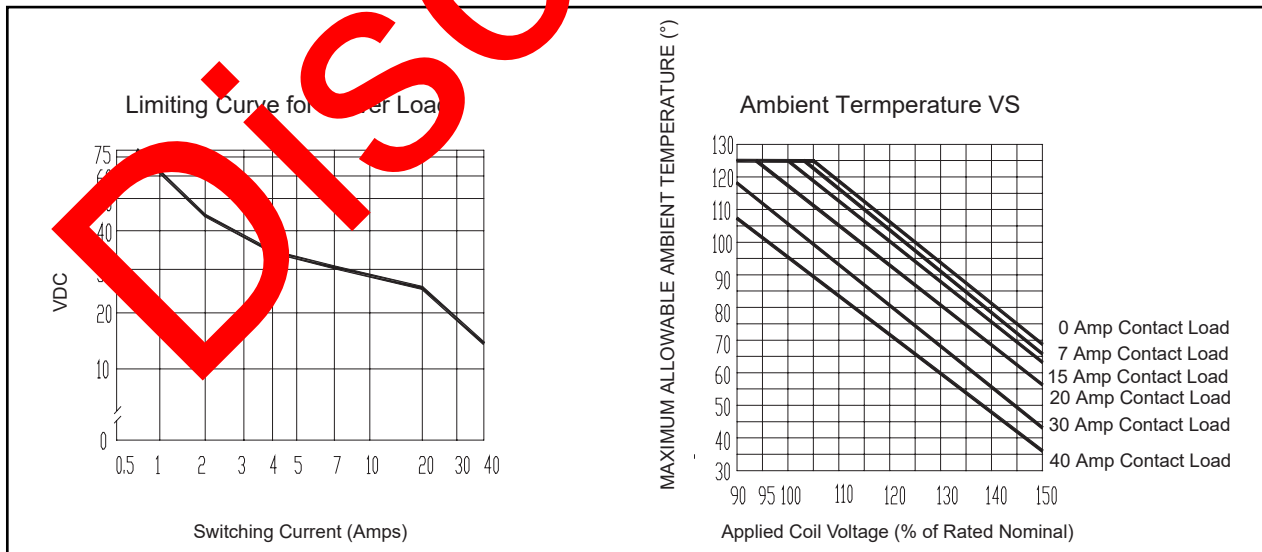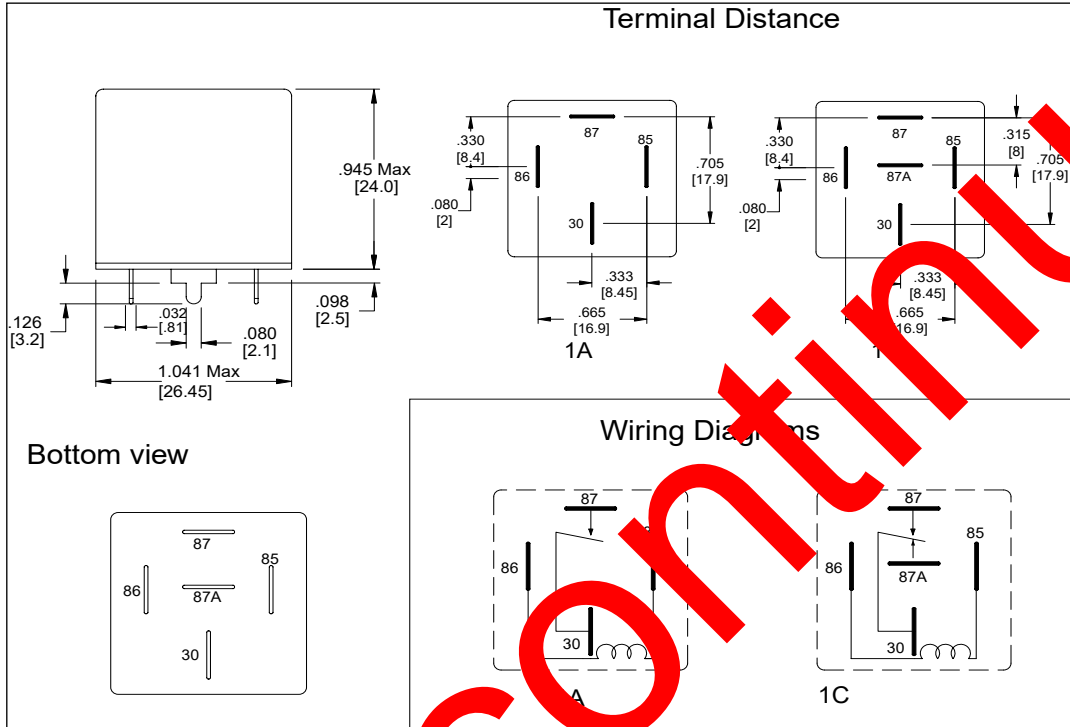

# AMERICAN ZETTLER, INC.

12/12/12

PHONE: (949) 831-5000

[www.azettler.com](http://www.azettler.com)

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.