

SGC-4F

SOLID STATE RELAY 2 AMP 250 VAC

FEATURES

- Photo isolation
- 600V blocking voltage
- Both “Zero Voltage” and phase controllable “Random” Switching versions
- High surge capability
- PCB mount
- UL, CUR file E43203



Input	Voltage	05D 12D 24D	4 to 6 VDC 9.6 to 14.4 VDC 19.2 to 28.8 VDC
	Turn-on Voltage	05D 12D 24D	4 VDC 9.6 VDC 19.2 VDC
	Current		15 mA
	Turn-off voltage		1 VDC
Output	Voltage Range		50 to 250 VAC
	Current Rating (max.)		2 A
	Inrush Current (non repetitive)		30 A
	Voltage Drop (max.)		1.5 VAC
	Minimum Load Current		15 mA
	Leakage Current (max.)		1.5 mA
	Zero Voltage Switching		Yes
	Min. Off-state Dv/Dt at Maximum Rated Voltage		15 V/us
	Frequency Range		47 to 70 Hz
	Time Turn-on		1/2 of cycle +1 ms
Time Turn-off		1/2 of cycle +1 ms	
General Characteristics	Dielectric Strength		2000 VAC, 1 min.
	Insulation Resistance		1000MΩ min. at 500 VDC
	Ambient Temp. Range (operating)		-30°C (-22°F) to 80°C (176°F)
	Termination		PCB terminal
	Weight		Approximately 5 grams
	Construction		Fully sealed

AMERICAN ZETTLER, INC. www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

6/3/03W

SGC-4F

RELAY ORDERING DATA

SGC-4F

05

D

0

T


MODEL	INPUT VOLTAGE	INPUT FORM	OUTPUT FORM	TERMINAL ARRANGEMENT/ MOUNT FORM
	05: 4 to 6V 12: 9.6 to 14.4V 24: 19.2 to 28.8V	D: DC	0: Zero-cross 1: Random Phase	T: Pin T M: Pin M

MECHANICAL DATA


<p>TERMINAL STYLE "T"</p>		<p>TERMINAL STYLE "M"</p>	
<p>PC BOARD LAYOUT</p> <p>Viewed toward terminals</p>	<p>WIRING DIAGRAM</p> <p>Viewed toward terminals</p>	<p>PC BOARD LAYOUT</p> <p>Viewed toward terminals</p>	<p>WIRING DIAGRAM</p> <p>Viewed toward terminals</p>

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

Load current vs. ambient temperature characteristics

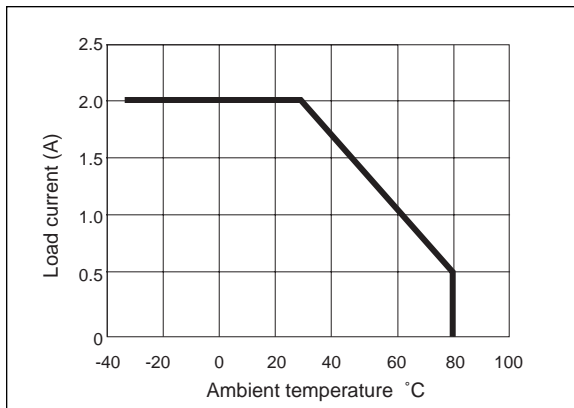

Inrush current resistivity Non-repetitive

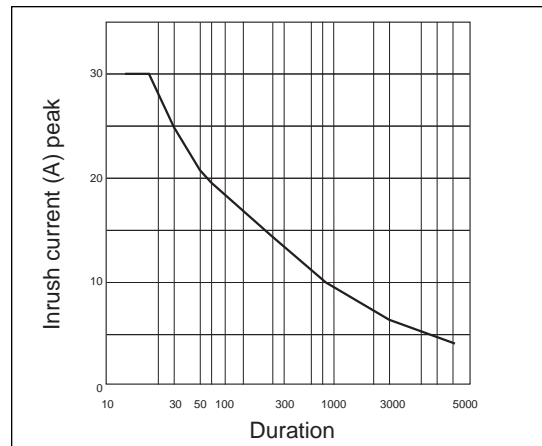

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM