

# AZ734

## DPST MINIATURE POWER RELAY

### FEATURES

- Dielectric strength 4000 Vrms
- Low cost
- Epoxy sealed version available
- 5 Amp switching — double pole contacts
- UL Class B insulation system
- UL, CUR file E43203



### CONTACTS

<b>Arrangement</b>	DPST (2 Form A)
<b>Ratings</b>	Resistive load: Max. switched power: 150 W or 1200 VA Max. switched current: 5 A Max. switched voltage: 150* VDC or 380 VAC  *Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load UL, CUR</b>	5 A at 250 VAC general use, 100k cycles 5 A at 30 VDC resistive, 100k cycles TV-3 at 125 VAC
<b>Material</b>	Silver cadmium oxide, silver tin oxide
<b>Resistance</b>	< 50 milliohms initially (24 V, 1 A voltage drop method)

### COIL

<b>Power At Pickup Voltage (typical)</b>	300 mW
<b>Max. Continuous Dissipation</b>	1.5 W at 20°C (68°F) ambient
<b>Temperature Rise</b>	45°C (81°F) at nominal coil voltage
<b>Temperature</b>	Max. 130°C (266°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 5 A 240 VAC Res.
<b>Operate Time (typical)</b>	15 ms at nominal coil voltage
<b>Release Time (typical)</b>	10 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	4000 Vrms contact to coil 1000 Vrms between open contacts 1000 Vrms between contact sets
<b>Insulation Resistance</b>	1000 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature Operating Storage</b>	-40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 130°C (266°F)
<b>Vibration</b>	0.062" DA at 10–55 Hz
<b>Shock</b>	20 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	13 grams


# AZ734

## RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Unsealed	Sealed
5	3.75	8.4	47	AZ734-2A-5D	AZ734-2A-5DE
6	4.5	10.0	68	AZ734-2A-6D	AZ734-2A-6DE
9	6.75	15.2	155	AZ734-2A-9D	AZ734-2A-9DE
12	9.0	20.1	270	AZ734-2A-12D	AZ734-2A-12DE
18	13.5	30.5	620	AZ734-2A-18D	AZ734-2A-18DE
24	18.0	40.2	1080	AZ734-2A-24D	AZ734-2A-24DE
48	36.0	81.2	4400	AZ734-2A-48D	AZ734-2A-48DE

\*Add suffix "A" for silver tin oxide contact material.

## MECHANICAL DATA

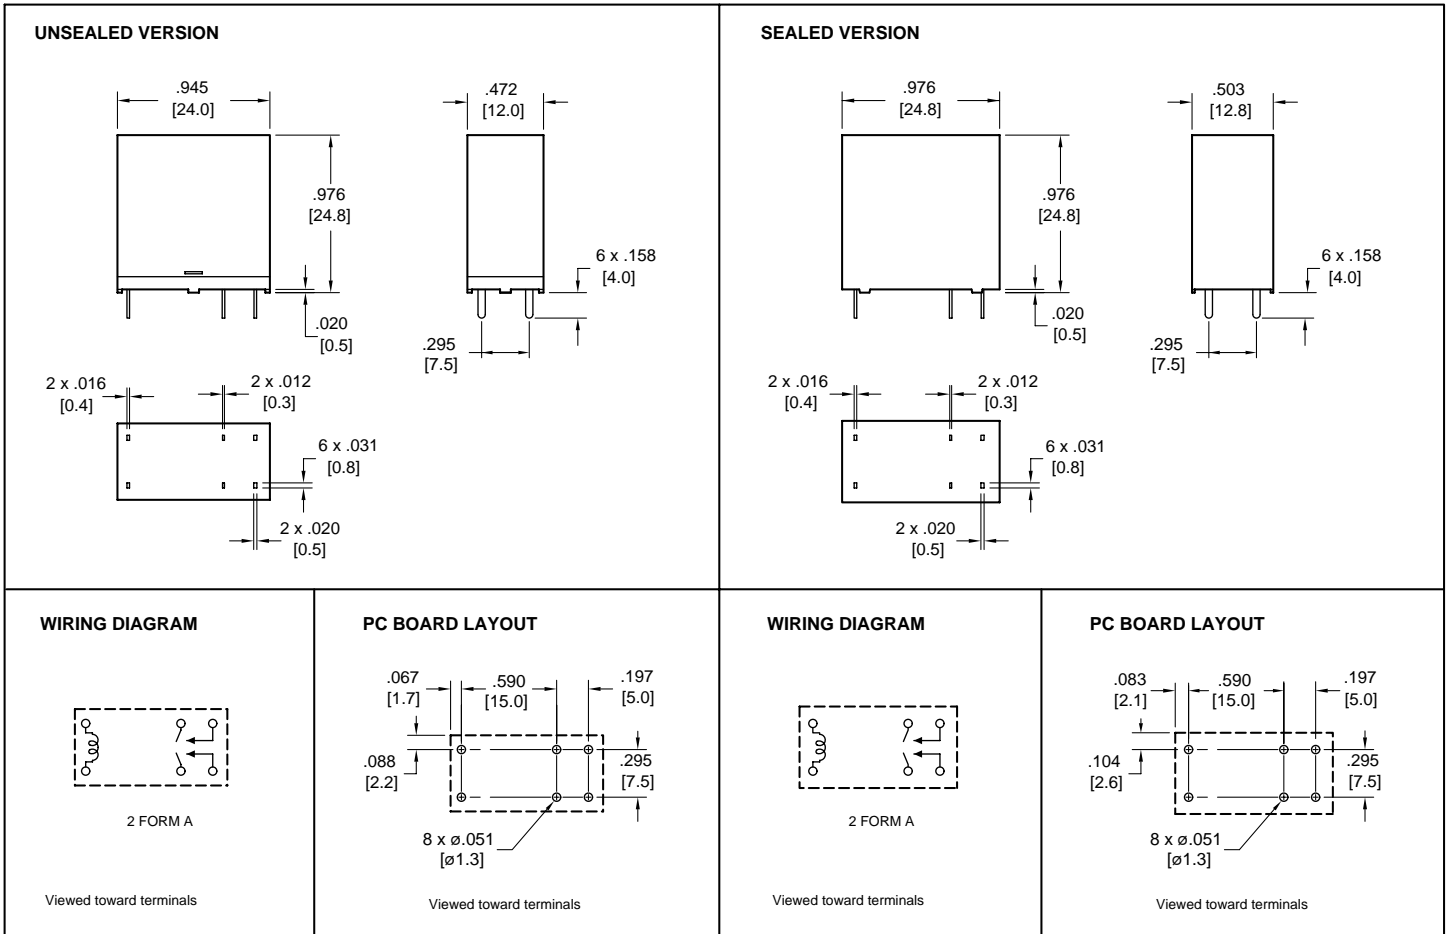

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

# AMERICAN ZETTLER, INC.

7/12/01W

PHONE: (949) 831-5000

[www.azettler.com](http://www.azettler.com)

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.